












ECOMOBILITY  
GENERAL  
CATALOGUE  
2015-2016  
PRODUCTS

3A TYPE CONNECTORS - SINGLE-PHASE 16 A 230 V~ 1P+N+PE+CP - IP44

DESCRIPTION	PACK.	CODE	DESCRIPTION	PACK.	CODE
 Plug	10/100	200.01633	 Flush-mounting socket-outlet with flange 70x87 mm	10/60	200.01663
 Angled plug	10/100	200.01633A	 Flush-mounting socket-outlet with interlock IP54	1/20	200.01663B
 Fixed plug with flange 70x87mm	10/40	200.01693	 Italian plug adaptor P17	10/100	200.01623
 Straight outlet	10/100	200.01643	 French-German plug adaptor	10/100	200.01624

DOMESTIC CONNECTORS - SINGLE-PHASE 16 A 230 V~ 1P+N+PE - MODE 1

DESCRIPTION	PACK.	CODE	DESCRIPTION	PACK.	CODE
 UNEL IP54 flush-mounting socket-outlet with flange 70x87 mm (with switch)	10/100	570.4062-SW	 UNEL IP54 flush-mounting socket-outlet with interlock	1/10	200.4007B

## DOMOPLUS Series

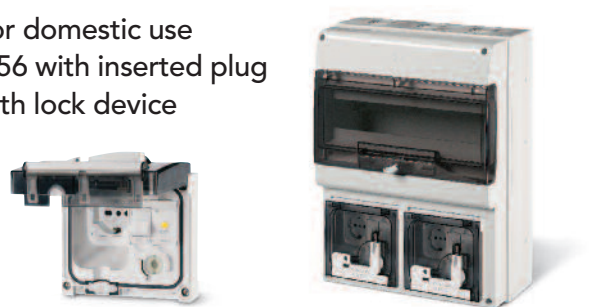
For domestic use  
IP66 with inserted plug



For additional information, please refer to our general catalogue




## OMNIAPLUS Series

For domestic use  
IP56 with inserted plug  
with lock device



For additional information, please refer to our general catalogue

3C TYPE CONNECTORS - SINGLE/THREE-PHASE 16 A - 32 A 400 V~ 3P+N+PE+CP+PP - IP44

	DESCRIPTION	PACK.	CODE		DESCRIPTION	PACK.	CODE
	Plug with screw terminals 1.5 to 6 mm <sup>2</sup>	10/40	200.33233		Crimped pin kit 2.5 mm <sup>2</sup>	10/100	200.332KITC2
	Plug with crimped terminals 2.5 mm <sup>2</sup>	10/40	200.33233C2(*)		Crimped pin kit 4 mm <sup>2</sup>	10/100	200.332KITC4
	Plug with crimped terminals 4 mm <sup>2</sup>	10/40	200.33233C4(*)		Crimped pin kit 6 mm <sup>2</sup>	10/100	200.332KITC6
	Plug with crimped terminals 6 mm <sup>2</sup>	10/40	200.33233C6(*)				
	Plug with crimped terminals 2.5 mm <sup>2</sup>	1	200.33234C2(*)		Flush-mounting socket-outlet with interlock IP54	1/20	200.33263B
	Plug with crimped terminals 4 mm <sup>2</sup>	1	200.33234C4(*)				
					Flush-mounting socket-outlet with flange 70x87 mm	10/60	200.33263

(\*) Cable to be defined at the time of the order.

TYPE 2 CONNECTORS - SINGLE/THREE-PHASE 16A - 32 A 400 V~ 3P+N+PE+CP+PP

	DESCRIPTION	PACK.	CODE		DESCRIPTION	PACK.	CODE
	Recessed socket-outlet with interlock system (plug and lid) IP54 without shutters IPXXB	1/10	200.23264B		Standard lid IP55 for: 200.232665 200.23266	12/120	200.23260CS
<b>NEW</b> 	Recessed socket-outlet with shutters IPXXD IP55 (mated) IP55 (with lid)	1/12	200.232665	<b>NEW</b> 	Compact lid IP55 for: 200.232665 200.23266 200.23265	12/120	200.23260CC
<b>NEW</b> 	Recessed socket-outlet without shutters IPXXB IP55 (mated) IP55 (with lid)	1/12	200.23266	<b>NEW</b> 	Top plug locking with rotary activator and 2 switches for locking detection for: 200.232665 200.23266 200.23265	12/120	200.23260BS
<b>NEW</b> 	Recessed socket-outlet without shutters IPXXB (compact version) IP54 (mated) IP55 (with lid)	1/12	200.23265	<b>NEW</b> 	Anti vandalic flange with interlock system (plug and lid) IP55	1/1	200.23260FA