



- General Purpose automotive or industrial relay
- Good inrush current resistance
- Ideal for DC motor control
- High continuous DC current capability
- Optimised for up to 110VDC switching
- Magnet arc blowout feature
- Industry standard terminal layout

ROHS  
Compliant ✓

### Contacts

Contact arrangement	SPST-NO (1 Form A), SPDT (1 Form C)
Contact material	AgSnO <sub>2</sub>
Max. switching voltage	DC 110VDC
Min. switching current / voltage	100mA / 12VDC
Rated load - see Fig. 1	DC1 60A @ 12VDC, 25A @ 36VDC, 20A @ 48VDC 15A @ 72VDC, 7A @ 110VDC
Max. switching current	make 120A @ 12.8VDC (3secs)
Initial Contact resistance	<100mΩ, at 0.1A / 6VDC

### Coil

Nominal voltage	DC 6 ... 60V
Must release voltage	≥0.1U <sub>n</sub>
Operating range	See Table 1
Rated power consumption	1.6W; 1.8W with resistor

### Insulation

Insulation resistance	100MΩ at 500VDC, 50%RH
Dielectric strength	coil to contact 750Vrms, 1min
	contact to contact 500Vrms, 1min

### General Data

Operating time	typ. 7ms
Release time	typ. 2ms
Electrical life	ops. 1 x 10 <sup>5</sup>
Mechanical life	ops. 1 x 10 <sup>7</sup>

### Environmental

Ambient temperature	operating	-40 to +125°C (above 85°C - consult factory)
	storage	-40 to +155°C
Shock resistance	functional	30g, 6ms
	destructive	100g
Vibration resistance		DA 1.27mm 10-40Hz / 40-70Hz:5g
		DA 0.5mm 100-500Hz: 10g
Dimensions	L x W x H	39.1 x 28 x 26mm (excluding terminals)
Weight	approx.	46g

### Ordering Code

D G 5 7 B M - 5 0 1 1 - 7 6 - 1 0 1 2 - D R

#### Series

#### Contact material

50: AgSnO<sub>2</sub>

#### Contact arrangement

11: SPDT (1 C/O, 1 Form C)  
21: SPST-NO (1 N/O, 1 Form A)

#### Environmental protection

3: In cover, sealed - IP67  
7: In cover, dust cover - IP54  
9: Cover with mounting bracket slot

#### Connection Mode

5: PCB Terminals  
6: Flat Blades

#### Options 1 (metal mounting bracket)

Nil: No option  
M1: Metal mounting bracket fitted

#### Options 2 (parallel components)

Nil: No option  
R: Integral resistor  
DR: Integral diode -85, +86 (standard)  
D: Integral diode +85, -86 (special order)


### Coil Data

Table 1

Coil code	Nominal voltage (VDC)	Coil resistance ( $\Omega$ $\pm 10\%$ at 23°C)	Must operate voltage max. at 23°C (VDC)	Max. allowable voltage at 23°C (VDC)	Max. allowable voltage at 85°C (VDC)	Must release voltage min. (VDC)
1006	6	22	3.6	8.7	6.3	0.6
1012	12	90	7.2	17.4	12.5	1.2
1024	24	330	14.4	34.8	25.0	2.4
1036	36	690	21.5	52.2	37.5	3.6
1048	48	1440	28.8	69.6	50.0	4.8
1050	50	1565	30.0	72.5	52.0	5.0
1060	60	1950	36.0	87.0	62.6	6.0


### Performance

Fig. 1

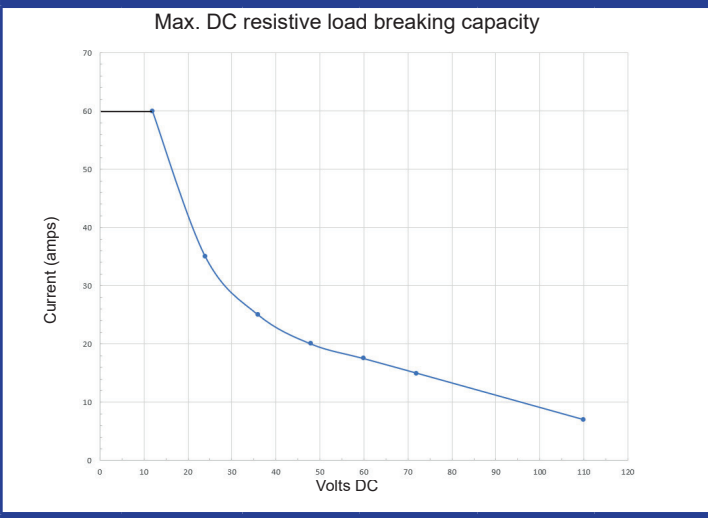

### Circuit Diagram

Fig. 2

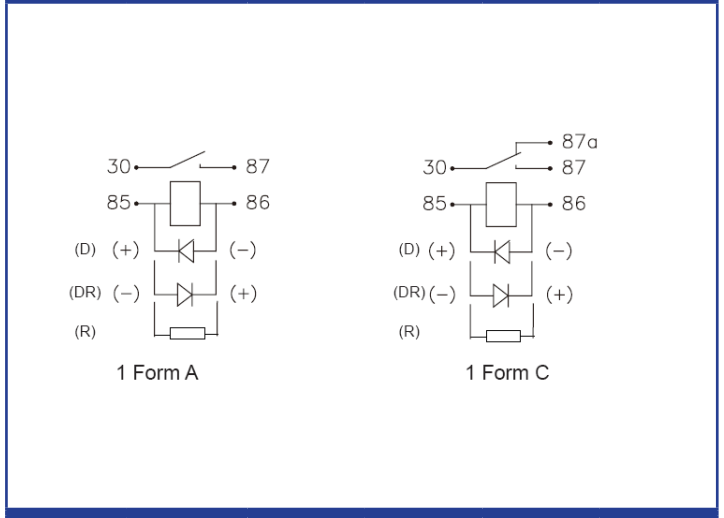

### Dimensions

Fig. 3

